

**T-head bolt hot-dip galvanized (HDG) incl. hex nut HBC-C 8.8**



**Applications**

- For use with HAC-40 to HAC-70 anchor channels

**Advantages**

- Dust-free, noiseless fastening method
- Simplification of the range available Only one universal bolt type needed to cover HAC-40 to HAC-70 anchor channels
- European approval according to the latest technical specifications


**Technical data**

<b>Anchor type</b>	T-head bolt
<b>Material, corrosion</b>	Steel, sherardized / hot-dip galvanized

**Approvals**

ETA	ETA-11/0006 for HAC (ETAG -, Option -)
Fire resistance	
Fatigue	

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

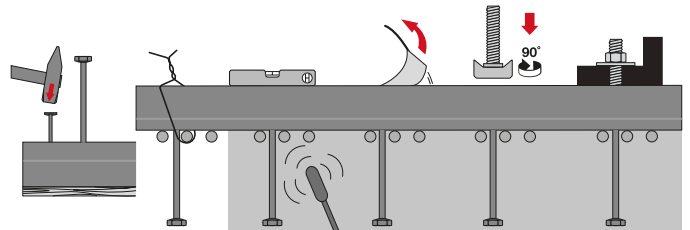

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to [www.hilti.com/techlib](http://www.hilti.com/techlib).

Ordering designation	Sales pack quantity	Item number
HBC-C M20x125 8.8F	25 pc	434410 <sup>1)</sup>
HBC-C M20x150 8.8F	25 pc	434411 <sup>1)</sup>
HBC-C M16x80 8.8F	50 pc	434406 <sup>1)</sup>
HBC-C M16x100 8.8F	50 pc	434407 <sup>1)</sup>
HBC-C M20x60 8.8F	50 pc	434408 <sup>1)</sup>
HBC-C M20x100 8.8F	50 pc	434409 <sup>1)</sup>
HBC-C M12x80 8.8F	100 pc	2019732 <sup>1)</sup>
HBC-C M12x100 8.8F	100 pc	2019733 <sup>1)</sup>
HBC-C M12x40 8.8F	100 pc	434401 <sup>1)</sup>
HBC-C M12x50 8.8F	100 pc	434402 <sup>1)</sup>
HBC-C M12x60 8.8F	100 pc	434403 <sup>1)</sup>
HBC-C M16x50 8.8F	100 pc	434404 <sup>1)</sup>
HBC-C M16x60 8.8F	100 pc	434405 <sup>1)</sup>

<sup>1)</sup> This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.